StreamCaster® 4200 Plus

Drop-in Module



Reduced SWaP... made easy.

S[®]LVUS technologies

LEADING THE MIMO REVOLUTION



STREAMCASTER 4200+ DROP-IN MODULE

FEATURES

- Familiar mechanical footprint, hole pattern, and JST connectors for plug-and-play compatibility with a variety of subsystems on the market today
- Industry-leading range, throughput, and robustness
- Reduced Size, Weight, and Power Consumption (SWaP)
- Dual bands without swapping hardware
- Anti-Jam and LPI/LPD enhancements
- Interoperable with StreamCaster (AN/PRC-169) Program of Record Radios

GENERAL

WAVEFORM	Mobile Networked MIMO (MN-MIMO)
ENCRYPTION	DES56 (Standard) AES256 (Optional) FIPS 140-3 Level 2
DATA RATE	Up to 100Mbps (Adaptive)
MIMO CONFIGURATION	2x2
MIMO TECHNIQUES	Spatial Multiplexing, Space-Time Coding TX/RX Eigen Beamforming
OUTPUT POWER	ImW - 10W variable (up to 20W effective w/TX Beamforming)
LATENCY	7ms average (20MHz BW)
SENSITIVITY	-99dBm @ 5MHz BW -105 dBm @ 1.25MHz BW (Optional
INPUT VOLTAGE	8-36v
FREQUENCY BANDS	Single/Dual Bands from 300MHz to 6GHz
CHANNEL BANDWIDTH (MHZ)	20/10/5 (2.5/1.25 Optional)
DATA INTERFACES	Ethernet, USB OTG, RS232
OPERATING TEMPERATURE	-40° to +85° C
POWER CONSUMPTION	5W - 48W @ 10W TX Power 5W - 24W @ 4W TX Power
WEIGHT	245 grams (260 grams for dual band)

SPECTRUM DOMINANCE - LPI/LPD & ANTI-JAM CAPABILITIES

AVAILABLE FEATURES

MANET Spectrum Analyzer (MAN-SA) MANET Power Control (MAN-PC)* MANET Protected Waveform (MAN-PW)* MANET Interference Cancellation (MAN-IC)* MANET Interference Avoidance (MAN-IA)

* ITAR-Controllec


BETA FEATURES

Silent Mode (RX Only) True Broadcast Dual Frequency Link (TX/RX)



Upgrade your platform with the power of MN-MIMO with streamlined integration and reduced time to market

> MECHANICAL (INCHES) / MM

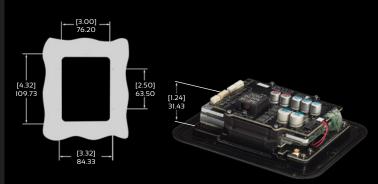



www.silvustechnologies.com

The following notice applies to the sale, lease, or offer of this device other than for use by the United States Covernment or for export: This device has not been authorized as required by the rules of the Federal Communications Commission. This device is not, and may not be, offered for sale or lease, or sold or leased, until authorization is obtained. Please contact Silvus for questions about the FCC approval status or requirements that pertain to this device including whether an FCC approved version is available. Exported devices are subject to the laws of the countries into which they are exported.