# StreamCaster® 4200 Plus

Drop-in Module



Reduced SWaP... made easy.






# STREAMCASTER 4200+ DROP-IN MODULE


#### **FEATURES**

- Familiar mechanical footprint, hole pattern, and JST connectors for plug-and-play compatibility with a variety of subsystems on the market today
- Industry-leading range, throughput, and robustness
- Reduced Size, Weight, and Power Consumption (SWaP)
- Dual bands without swapping hardware
- · Anti-Jam and LPI/LPD enhancements
- Interoperable with StreamCaster (AN/PRC-169) Program of Record Radios



Upgrade your platform with the power of MN-MIMO with streamlined integration and reduced time to market

#### **MECHANICAL** (INCHES) / MM

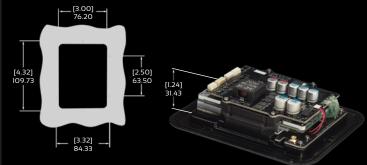

# **GENERAL**

WAVEFORM	Mobile Networked MIMO (MN-MIMO)
ENCRYPTION	DES56 (Standard) AES256 (Optional) FIPS 140-3 Level 2
DATA RATE	Up to IOOMbps (Adaptive)
MIMO CONFIGURATION	2x2
MIMO TECHNIQUES	Spatial Multiplexing, Space-Time Coding TX/RX Eigen Beamforming
OUTPUT POWER	lmW - 10W variable (up to 20W effective w/TX Beamforming)
LATENCY	7ms average (20MHz BW)
SENSITIVITY	-99dBm @ 5MHz BW -105 dBm @ 1.25MHz BW (Optional
INPUT VOLTAGE	8-36v

FREQUENCY BANDS Single/Dual Bands from 300MHz to 6GHz

**CHANNEL BANDWIDTH (MHZ)** 20/10/5 (2.5/1.25 Optional)

**DATA INTERFACES** Ethernet, USB OTG, RS232

**OPERATING TEMPERATURE** -40° to +85° C

POWER CONSUMPTION 5W - 48W @ 10W TX Power 5W - 24W @ 4W TX Power

WEIGHT 245 grams (260 grams for dual band)

# **SPECTRUM DOMINANCE 2.0** LPI/LPD, ANTI-JAM & ADVANCED THREAT PROTECTION CAPABILITIES

## **AVAILABLE FEATURES**

MANET Spectrum Analyzer (MAN-SA)

MANET Power Control (MAN-PC)\*

Wake on Wireless

MANET Interference Cancellation (MAN-IC)\*

MANET Interference Avoidance (MAN-IA) MANET Protected Waveform (MAN-PW)\*

**Dual Frequency Link** 



## www.silvustechnologies.com